

SF40BB Breathable Insulation

Thermal Insulation for use in
Roofs & Walls


LOCAL AUTHORITY
BUILDING CONTROL
REGISTERED

U-VALUE SOLUTIONS
AS LOW AS
U0.10

IDEAL FOR NEW BUILD
OR RETROFIT

ROOF
R3.67

WALL
R3.98

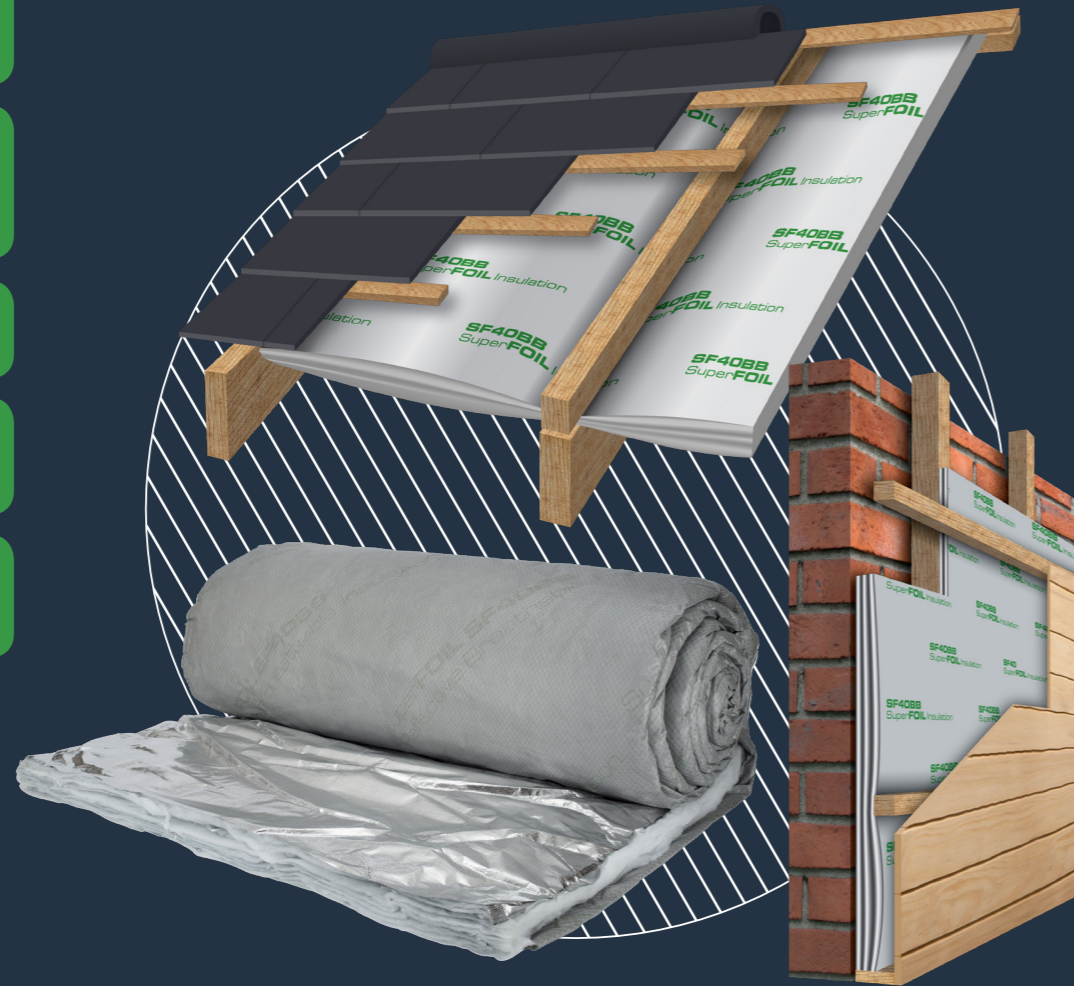

USAGE



Super**FOIL**.co.uk

QUALITY SYSTEM
MANUFACTURED TO:
ISO 9001:2015

KEY FEATURES

- SF40BB has a certified R value of R3.67 in a roof & R3.98 in a wall.
- Acts as a breathable membrane and insulation in one.
- Helps to prevent the formation of mould and damp by reducing the risk of condensation.
- W1 watertight means SF40BB can be used in both roofs & walls.
- SuperFOIL can be used on its own, in a multiple layers or with any other form of insulation to achieve any U-value
- Ideal for use in walls and roof structures in new builds and in renovation, refurbishment / extension project.
- Easily fit with minimal wastage and manufactured with 40% recycled materials.



TECHNICAL

PRODUCT DIMENSIONS

Thickness	75mm
Length	10m
Width	1.5m
Coverage	15sqm
Weight	17.5kg

Sizes / Figures are approximate & Subject to change without notice, tolerance +/- 5%

FIRE PERFORMANCE

Reaction to Fire (Euroclass)	Class D (behind plasterboard)
------------------------------	-------------------------------

THERMAL PERFORMANCE

Core	2.9 R Value
Roof (inc. air spaces)	3.67 R Value
Wall (inc. air spaces)	3.98 R Value
Emittance	0.03/0.3

ADDITIONAL INFO

Water Vapour Resistance	0.115MNs/g
Water Vapour Transmission	0.023Sd
Resistance to water penetration	W1
Flexibility at low temp.	-40c
Tensile Strength	194 N/50mm



Super**FOIL**.co.uk